

## SUBSEA TECH Marine and Underwater Technologies

# The UVS100IP / UVS300IP system

is an ultra-compact underwater video system that can operate on sector or batteris. It can control up to 4 full HD cameras with integrated LED lighting, allowing to perform any type of underwater visual inspection, directly from the surface with a telescopic pole, via diver (handle or headset) or on a fixed or mobile underwater stand.


The surface console integrates a 17" screen that can be split and can broadcast and record up to 4 video streams.





### **VIDEO CAMERA**

The video camera can accommodate from 1 to 4 full HD cameras of high sensitivity (0.01 lux), integrated in Acetal (100 m) or stainless steel (300 m) housings.



#### BATTERIES

Thanks to its embedded NiMH batteries, the UVS100IP / UVS300IP is completely autonomous in energy for up to 4 hours.



### ULTRA-PORTABLE

Packaged in a single waterproof case with small dimensions and low weight, the UVS100IP / UVS300IP is one of the most compact video systems on the market.

### **TECHNICAL SPECIFICATIONS**

### **VIDEO CAMERA FEATURES**

Max. depth	100m (POM/Acetal casing), 300m (stainless steel casing)
Dimensions	ø 66mm x L 110mm
Weight	Stainless steel version 820g, POM version 280g
Waterproofing	IP68
Sensor	Resolution 1920x1080p, sensitivity 0.01 lux
Lighting	Integrated LED in camera housing (2400 lumens), with intensity control
Number of cameras	Up to 4 simultaneous cameras

#### **CONSOLE FEATURES**

Dimensions	W 470mm x D 370mm x H 180mm
Weight	11,5kg
Video display	Anti-glare screen 17"
Batteries	NiMH batteries, 24V - 4500mAh
Power	On batteries : 48W max. On sector : 80W max.
Autonomy	Up to 4 hours with charge level indicator
Recorder	Buil-in PC with 250 Go (larger storage size available on request)
Output	1 HDMI, 1 RJ45 et 3 USB

### UMBILICAL

Standard


100m neutre (Ø 7,9mm), Kevlar braid 100% flowing (Ø 6,3mm) on request

PACKAGING	
Transport	Transport pellicase for all the material
Weight	<30 kg
MAINTENANCE	AND WARRANTY
Documentation	Manual operator in paper and digital version
Maintenance	No specific maintenance required
Warranty	1 year, man-hours and parts, excl. transport costs.
OPTIONS	
Depth gauge	Can be integrated into the camera housing with screen overlay
Winch	Manual winch with rotating collector
Telescopic pole	Pole with camera attachment (length on request)
Diver supports	Handle or headset holder
Support contract	Annual maintenance contract with free updates
Other options	On demand
A Com	





ø 66 mm

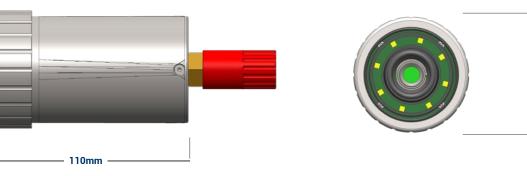

### WWW.SUBSEA-TECH.COM



🧹 st.sales@subsea-tech.com

- 🤇 +

+33 (0) 491 517 671

